


ZGFK Greifzylinder kurz mit externen Schlitten

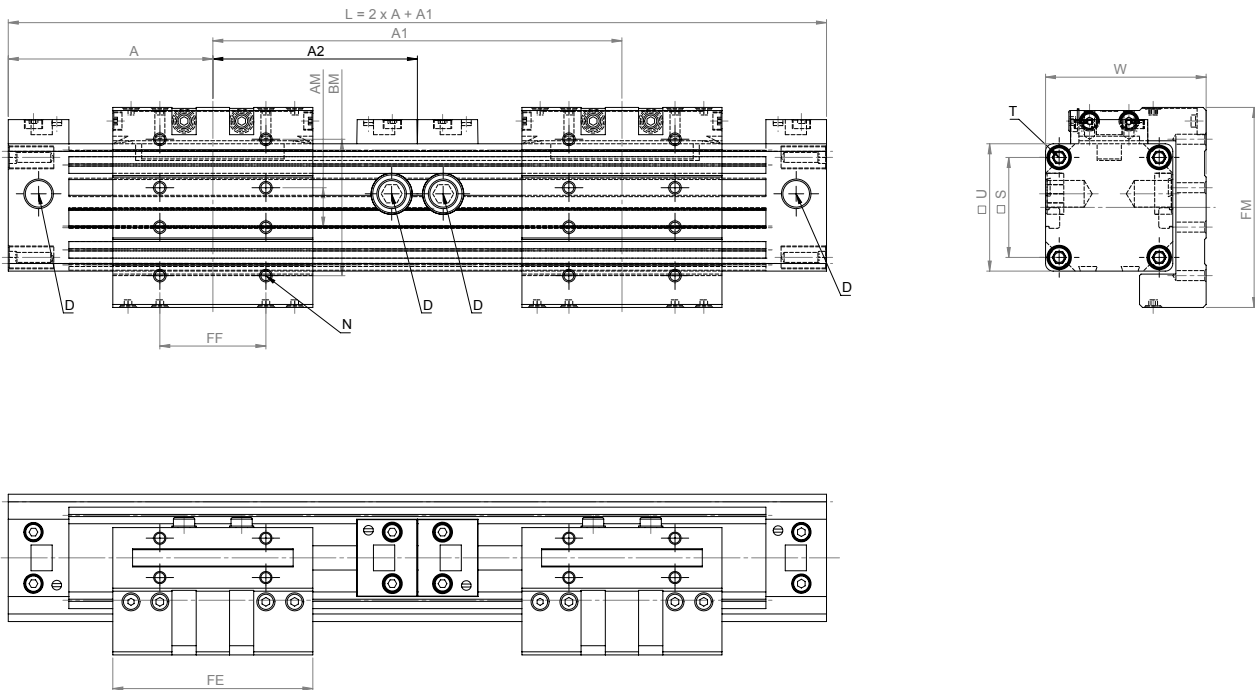

Measurements table

Maßtabelle

| Piston-Ø Kolben-Ø | Ø 18 mm | Ø 25 mm | Ø 32 mm | Ø 40 mm | Ø 50 mm | Ø 63 mm |
|-----------------------------------|---------------------|--------------|--------------|---------------|---------------|---------------|
| A | 57,5 | 67,5 | 77,5 | 95 | 105 | 125 |
| A1 at least A1 min. | 115 | 135 | 155 | 190 | 210 | 250 |
| A2 | A2 = A + Stroke Hub | | | | | |
| AM | 10 | 13 | 16 | 22 | 29 | 40 |
| BM | 35 | 45 | 55 | 70 | 85 | 105 |
| D x thread depth D x Gewindetiefe | M5 x 6 mm | G1/8" x 8 mm | G1/8" x 8 mm | G1/4" x 12 mm | G1/4" x 12 mm | G3/8" x 12 mm |
| FE | 58 | 66 | 86 | 110 | 130 | 153 |
| FF | 30 | 35 | 55 | 70 | 70 | 100 |
| FM | 50 | 66 | 80 | 97 | 116 | 136 |
| L | L = 2 x A + A1 | | | | | |
| N x thread depth N x Gewindetiefe | M3 x 6 mm | M4 x 7 mm | M5 x 9 mm | M6 x 10 mm | M8 x 12 mm | M8 x 15 mm |
| S | 23,5 | 33 | 41 | 51 | 63 | 78 |
| T x thread depth T x Gewindetiefe | M3 x 7 mm | M4 x 9 mm | M5 x 10 mm | M6 x 12 mm | M8 x 12 mm | M8 x 12 mm |
| U | 30 | 42 | 52 | 63 | 78 | 93 |
| W | 39 | 53 | 65 | 79 | 96 | 113,5 |
| Cushioning length Dämpfungsweg | 15 | 18 | 24 | 34 | 40 | 49 |

Example for order:
ZGFK Ø 25 Gripping cylinder short with external carriages
distance A1 400 mm with stroke 100 mm

Bestellbeispiel:
ZGFK Ø 25 Greifzylinder kurz mit externen Schlitten
Abstand A1 400 mm mit Hub 100 mm

Order number Bestellnummer

| | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 5 | 2 | 5 | 4 | - | 0 | 4 | 0 | 0 | - | 0 | 1 | 0 | 0 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|